


MINIMAG +MINIMAG F

MT

Horizontal magnetic benches

BENCHES DESCRIPTION

Horizontal magnetic particle benches *MINIMAG* series are intended for non-destructive testing of ferromagnetic steels and irons by magnetic particle method. The equipments are designed for connecting of current generators *MAGMAN* series for AC, HW and single-phase FWDC currents.

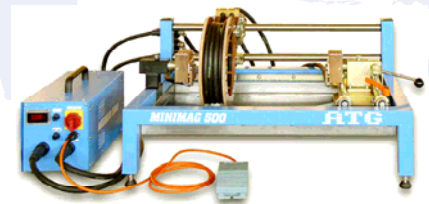

The workstation at „Table Top“ furniture

BASIC DESCRIPTION

- Circular (current) magnetization by direct flow through part or by auxiliary conductor
- Longitudinally (lengthwise) magnetization by movable coil
- 4 turns of 95 mm² cable or 3 turns 150 mm², diameter 250 mm
- Clamping length from 50 up to 520 mm or (option) 1000 mm, maximum load 50 kg (25 kg on one brace)
- CuSn wire-netting exchangeable contacts for circular magnetization
- Manually switching between circular and coil magnetization by switch-over of connector
- Basic dimensions 1000 x 700 x 550 mm



Stationary type MINIMAG F
(customer's solution)

OPTIONS, ACCESSORIES

- AC, and/or HW + FWDC current generators *MAGMAN* from 1500_{peak} A up to 4000 A_{peak}
- Lever-switch for switching between current and coil magnetization
- UV lamps, UV meters, Luxmeters, Gauss-Tesla meters, gauges, ASTM centrifuge tube
- *SPRINKMAN* - the stainless tanks on 15 litres or 40 litres of suspension, hand hose, pump 90 VA, feeding 3+PE 400 V - 50 Hz
- Powders, concentrates and suspensions *CHEMETALL* / *ARDROX*



Sprinkman 15